



US009080816B2

(12) **United States Patent**
Wickham

(10) **Patent No.:** **US 9,080,816 B2**
(45) **Date of Patent:** **Jul. 14, 2015**

(54) **EXHAUST RECOVERY HEAT EXCHANGER WITH INLET DAMPER**

USPC 165/103, 100; 137/247.29, 248, 601.08,
137/601.05, 601.09, 601.11, 601.04;
251/205, 212, 298

(75) Inventor: **Mark Wickham**, Birmingham West Midlands (GB)

See application file for complete search history.

(73) Assignee: **HEAT RECOVERY SOLUTIONS LIMITED**, London (GB)

(56) **References Cited**

U.S. PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 990 days.

1,979,865 A * 11/1934 Chadwick et al. 126/285 R
2,324,606 A * 7/1943 Wagner 73/861.81

(Continued)

(21) Appl. No.: **13/056,254**

FOREIGN PATENT DOCUMENTS

(22) PCT Filed: **Jul. 30, 2009**

CN 1179185 C 12/2004
EP 1923545 A2 * 5/2008
WO 2007084011 7/2007

(86) PCT No.: **PCT/GB2009/050946**

§ 371 (c)(1),
(2), (4) Date: **Mar. 10, 2011**

OTHER PUBLICATIONS

(87) PCT Pub. No.: **WO2010/013053**

English Translation of EP 1923545 A2.*

PCT Pub. Date: **Feb. 4, 2010**

(Continued)

(65) **Prior Publication Data**

US 2011/0180234 A1 Jul. 28, 2011

Primary Examiner — Allen Flanigan

Assistant Examiner — Claire Rojohn, III

(74) *Attorney, Agent, or Firm* — Fox Rothschild LLP

(30) **Foreign Application Priority Data**

Jul. 30, 2008 (GB) 0813938.8
Dec. 11, 2008 (GB) 0822584.9

(57) **ABSTRACT**

A heat exchange unit (100) for hot gas recovery includes an inlet duct (34) in which a heat exchange duct (59) and a bypass duct (58) are connected, one being surrounded by the other, a heat exchange array (2) situated within the heat exchange duct (59) and a damper (50) arranged to direct the flow of gas through the unit (100), such that the damper (50) is situated within the inlet duct (34) and has two extreme positions, such that in a first extreme position the damper provides a first continuous surface and substantially seals one of the heat exchange and bypass ducts from the inlet duct and in the other extreme position the damper provides a second continuous surface and substantially seals the other of the ducts from the inlet duct.

(51) **Int. Cl.**

F28F 27/02 (2006.01)

A62B 9/02 (2006.01)

(Continued)


(52) **U.S. Cl.**

CPC **F28D 7/106** (2013.01); **F28F 27/02**
(2013.01); **F28D 21/0003** (2013.01); **F28D**
2021/0082 (2013.01); **F28F 2250/06** (2013.01);
F28F 2265/10 (2013.01)

(58) **Field of Classification Search**

CPC F28F 27/0006; F28F 27/02; F24F 11/027;
B60H 1/025

23 Claims, 13 Drawing Sheets

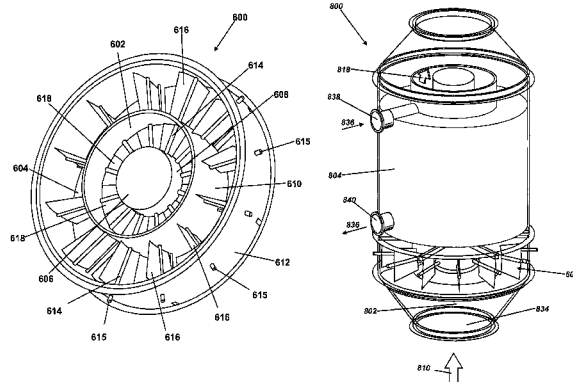

(51) **Int. Cl.**
F16K 31/00
F16K 1/16
F28D 7/10
F28D 21/00

(2006.01)
(2006.01)
(2006.01)
(2006.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,393,170	A *	1/1946	Kinney et al.	138/37
2,692,761	A *	10/1954	Waitkns	165/7
2,833,513	A *	5/1958	Castera	251/298
2,877,860	A *	3/1959	Hoffar	181/246
3,068,892	A *	12/1962	Panning et al.	137/499
3,076,469	A *	2/1963	Averill	137/74
3,246,633	A *	4/1966	Csathy	122/7 R
3,768,729	A *	10/1973	Dean, Jr.	236/13
4,313,428	A *	2/1982	Goldenberg	126/591
4,482,009	A *	11/1984	Nishimura et al.	165/203
4,498,524	A *	2/1985	Jacobsen	165/292
4,522,256	A *	6/1985	Wolfseder	165/103
4,532,961	A *	8/1985	Walton et al.	137/625.31
4,747,748	A *	5/1988	Sahlberg	415/47
4,813,649	A *	3/1989	Takeda et al.	251/315.05
5,163,829	A *	11/1992	Wildenberg	431/5
5,379,800	A *	1/1995	Mansfield	137/875
5,737,937	A *	4/1998	Akazawa	62/303
6,010,113	A *	1/2000	Rotering	251/212
6,102,103	A *	8/2000	Zobel et al.	165/10
6,116,264	A *	9/2000	Bachmann et al.	137/240
6,151,891	A *	11/2000	Bennett	60/298
6,302,191	B1 *	10/2001	Wickham et al.	165/103
6,330,910	B1 *	12/2001	Bennett	165/297
6,955,213	B2 *	10/2005	Stonehouse et al.	165/103

7,011,292	B1 *	3/2006	Hill	251/212
7,264,040	B2 *	9/2007	Bush et al.	165/103
7,546,868	B2 *	6/2009	Klein et al.	165/203
7,836,868	B2 *	11/2010	Gonzalez et al.	123/568.12
8,297,049	B2 *	10/2012	Ohtani	60/317
2003/0111211	A1 *	6/2003	Stonehouse et al.	165/103
2004/0107943	A1 *	6/2004	Alder et al.	123/456
2005/0133202	A1 *	6/2005	Jorgensen et al.	165/103
2005/0217667	A1 *	10/2005	Dhuper et al.	128/200.23
2008/0120019	A1 *	5/2008	Inoue et al.	701/113
2010/0025609	A1 *	2/2010	Pubben et al.	251/213
2013/0139492	A1 *	6/2013	Wickham	60/320
2014/0076292	A1 *	3/2014	Gaiser et al.	123/568.12
2014/0076293	A1 *	3/2014	Gaiser et al.	123/568.12

OTHER PUBLICATIONS

International Search Report issued for PCT/GB2009/050946 dated Feb. 19, 2010 (5 pages).

First Office Action issued Jun. 25, 2012 in Chinese Patent Appln. No. 200980138150.6 and English translation (16 pages).

Second Office Action issued Feb. 6, 2013 in Chinese Patent Appln. No. 200980138150.6 and English translation (8 pages).

Third Office Action issued Jul. 1, 2013 in Chinese Patent Appln. No. 200980138150.6 and English translation (7 pages).

Fourth Office Action issued Jan. 6, 2014 in Chinese Patent Appln. No. 200980138150.6 and English translation (7 pages).

European Search Report issued Oct. 19, 2011 in European Patent Appln. No. 09785420.2 (4 pages).

European Search Report issued Jul. 26, 2012 in European Patent Appln. No. 09785420.2 (4 pages).

Office Action for Australian Application No. 2009275670.

* cited by examiner

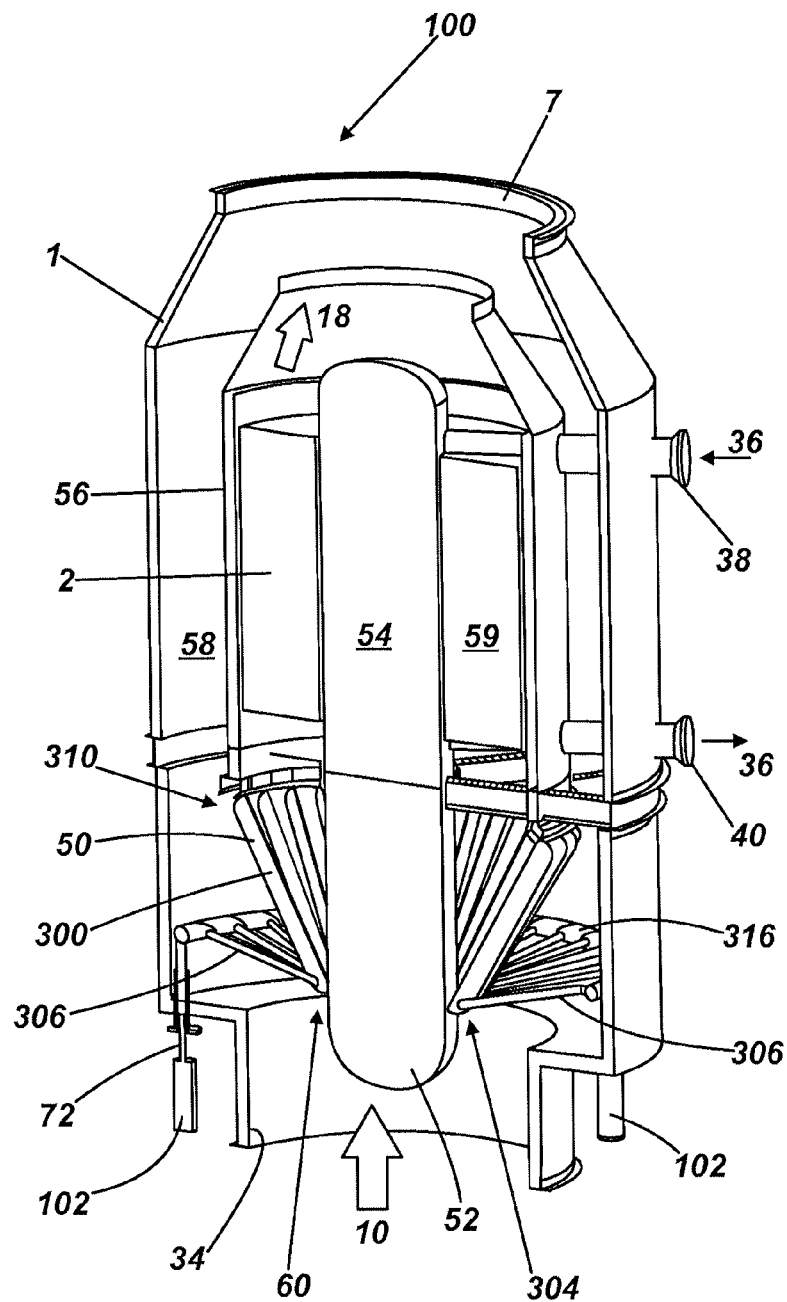


Fig. 1

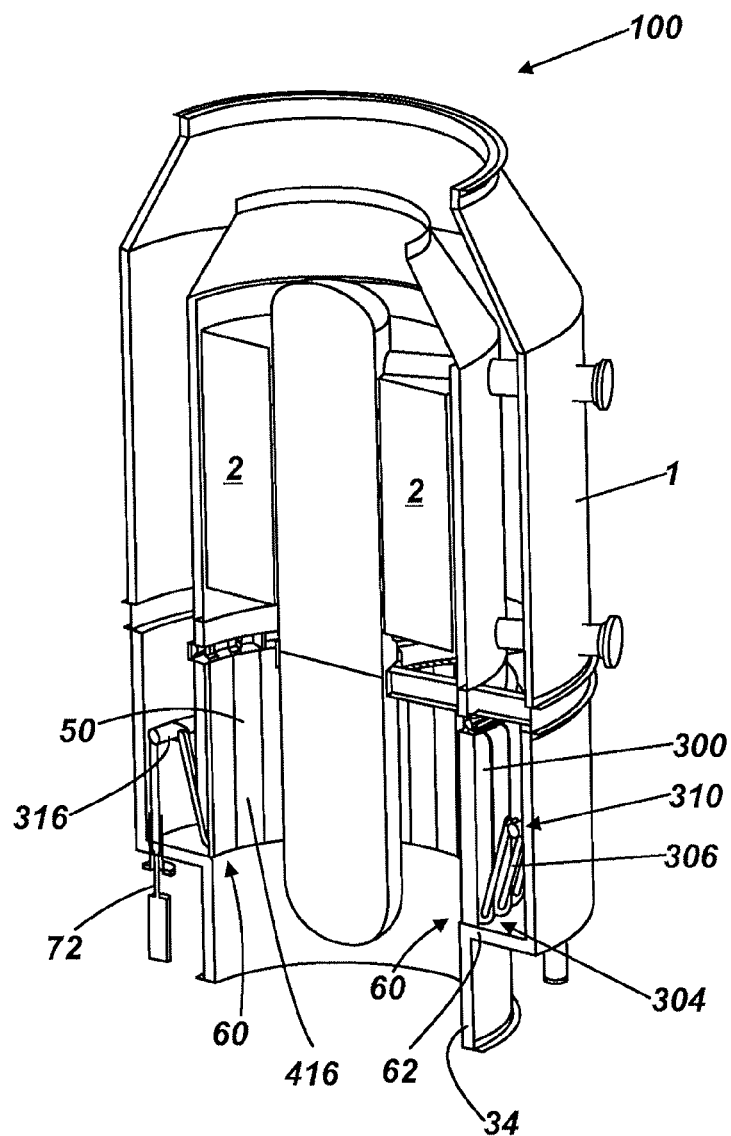


Fig. 2

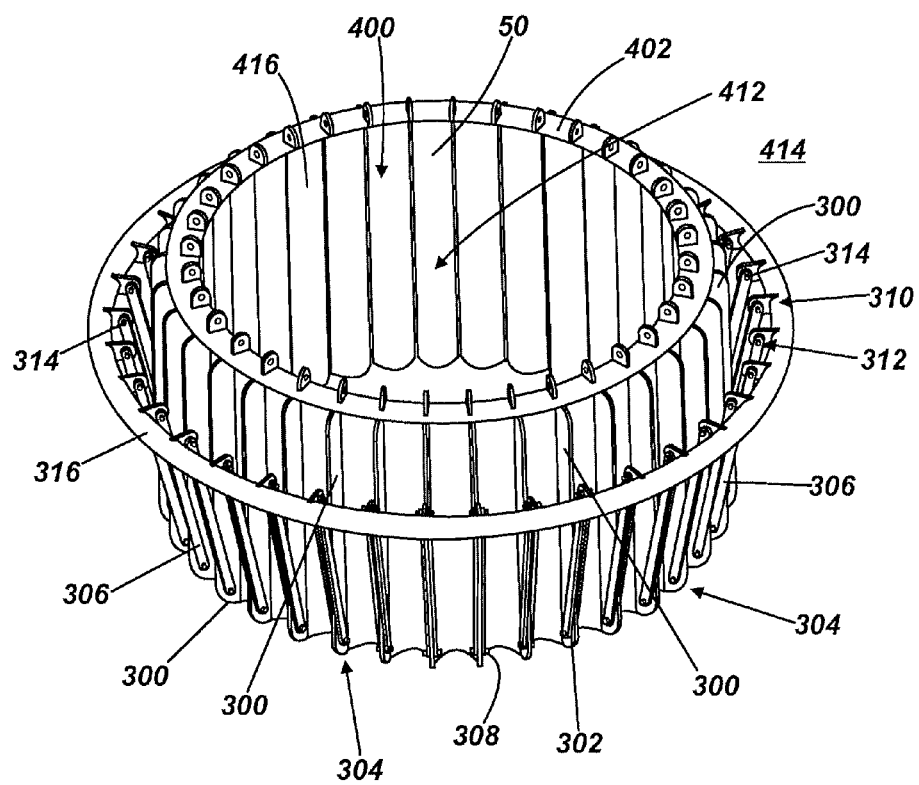


Fig. 3

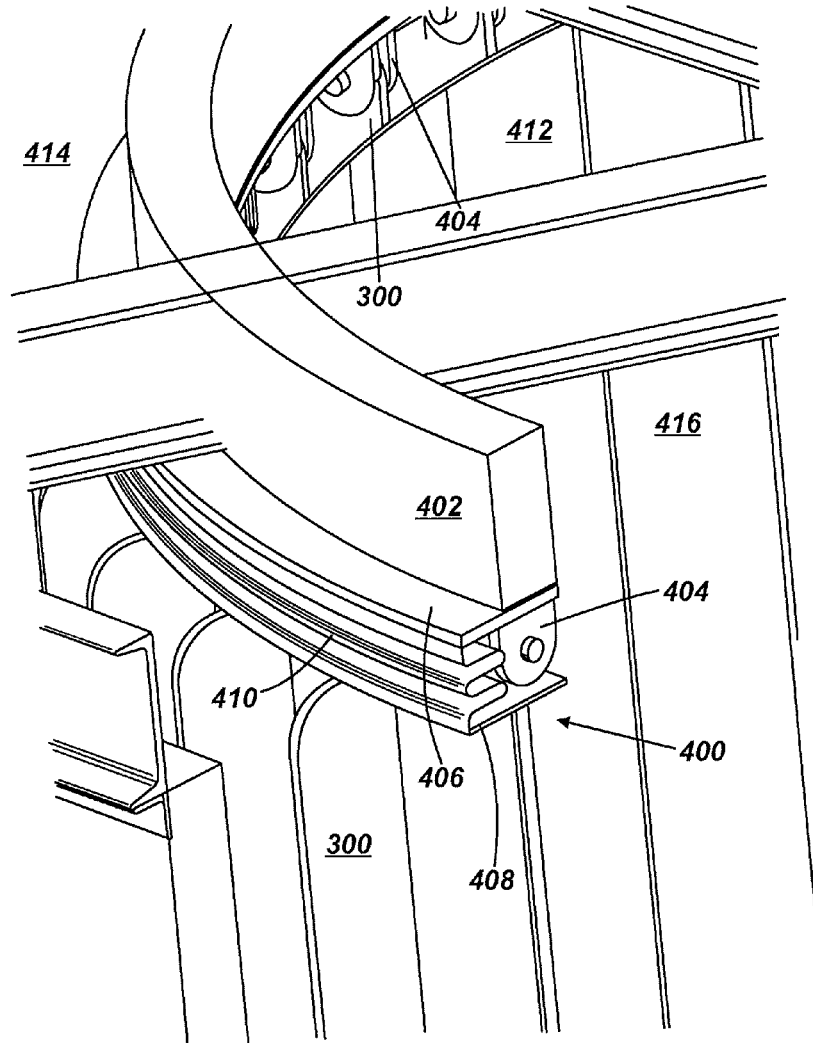
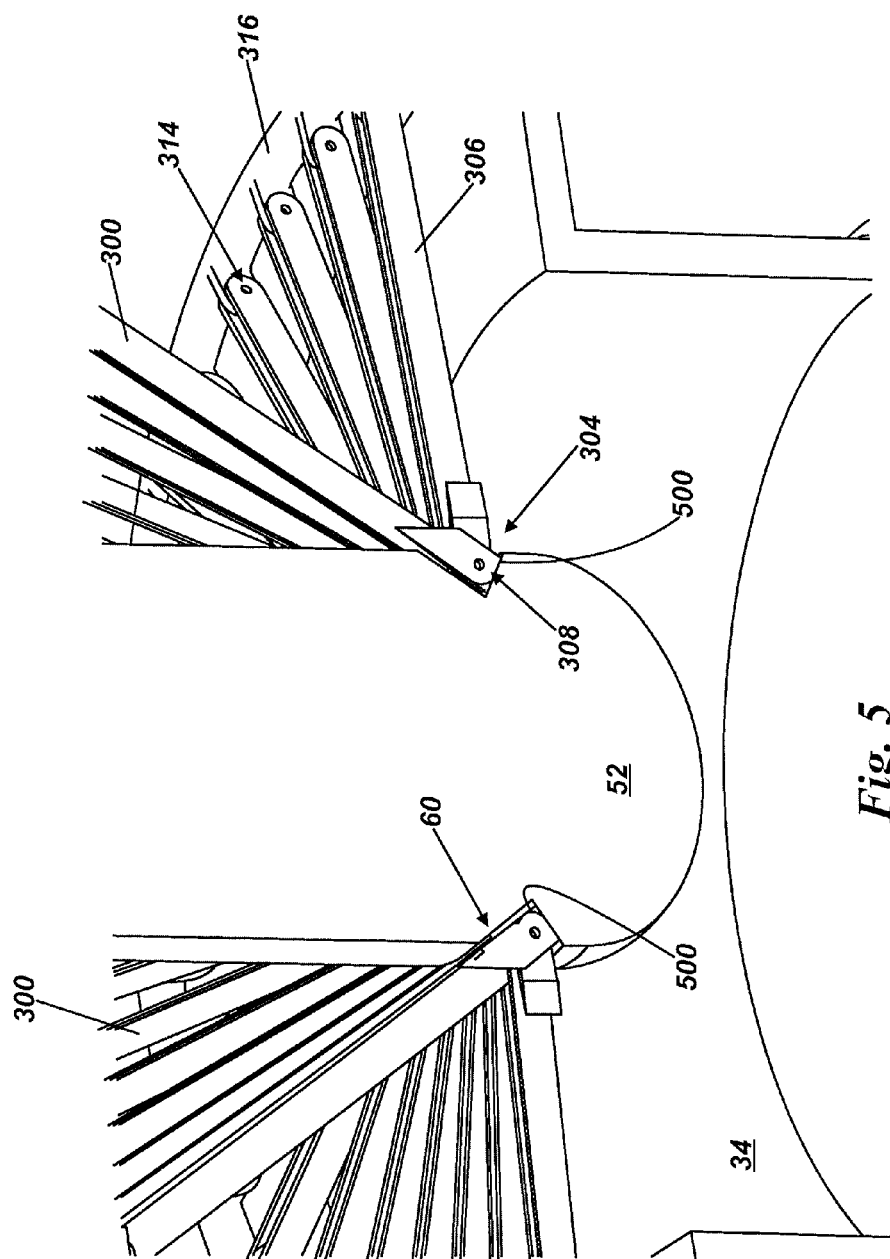


Fig. 4



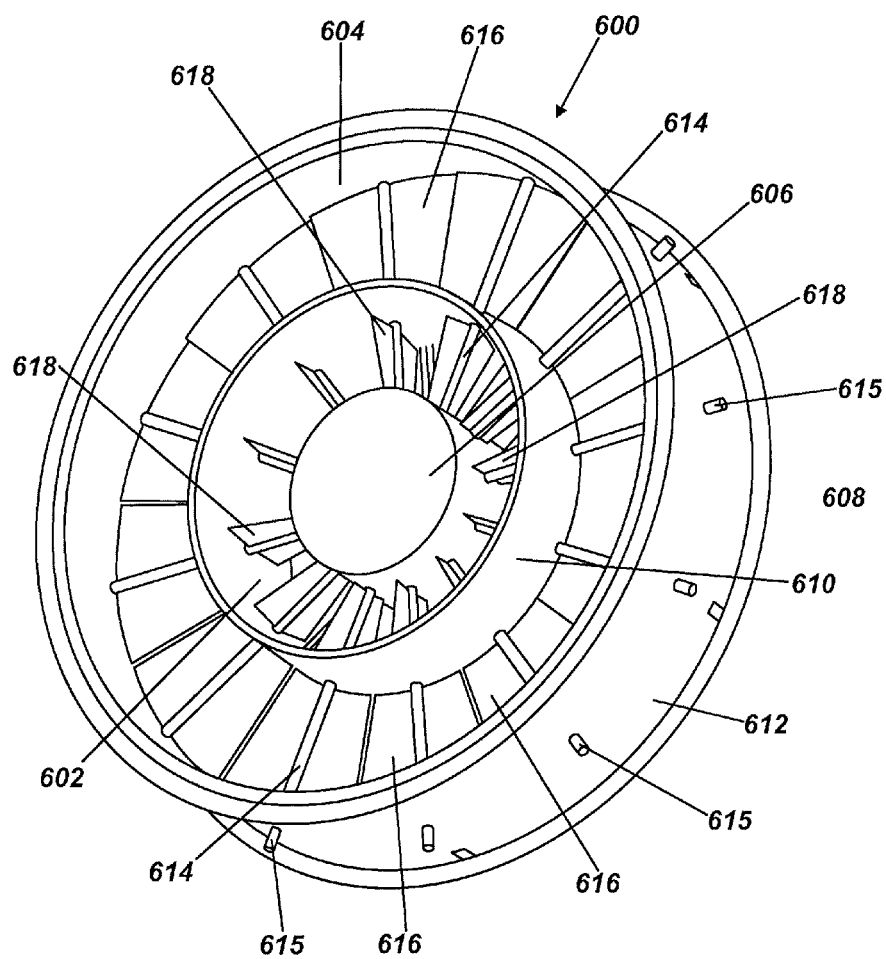


Fig. 6

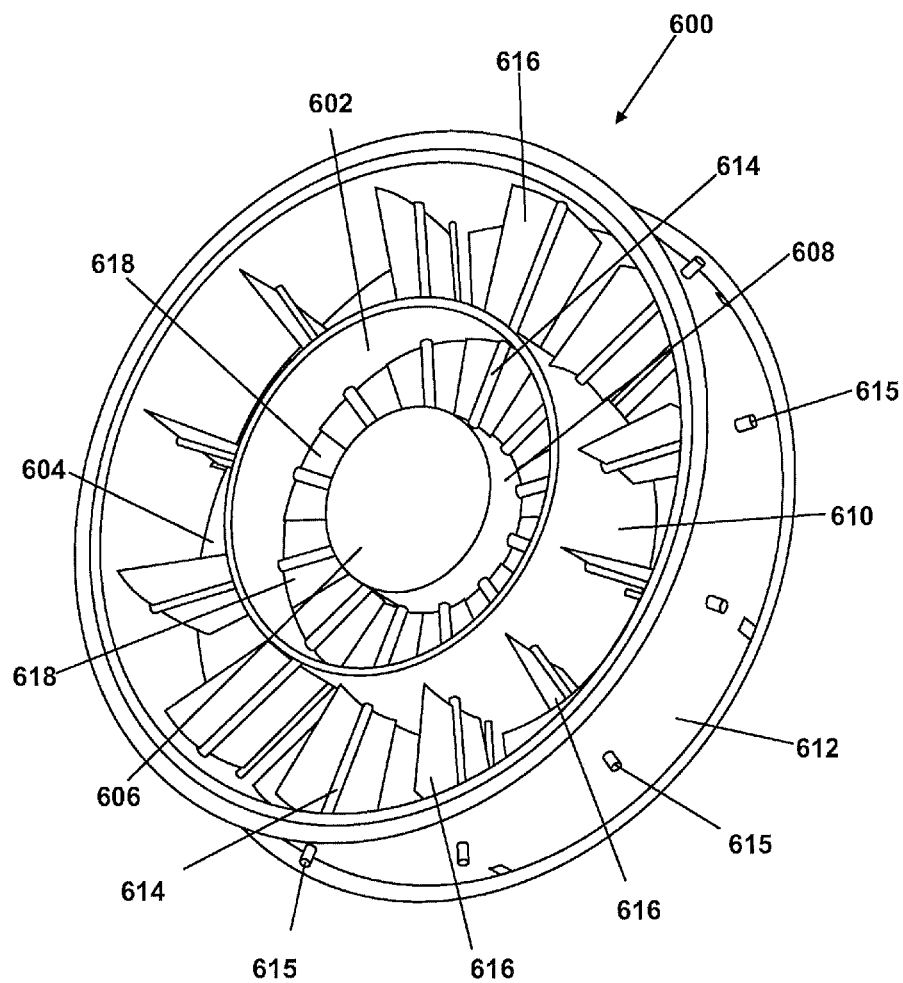


Fig. 7

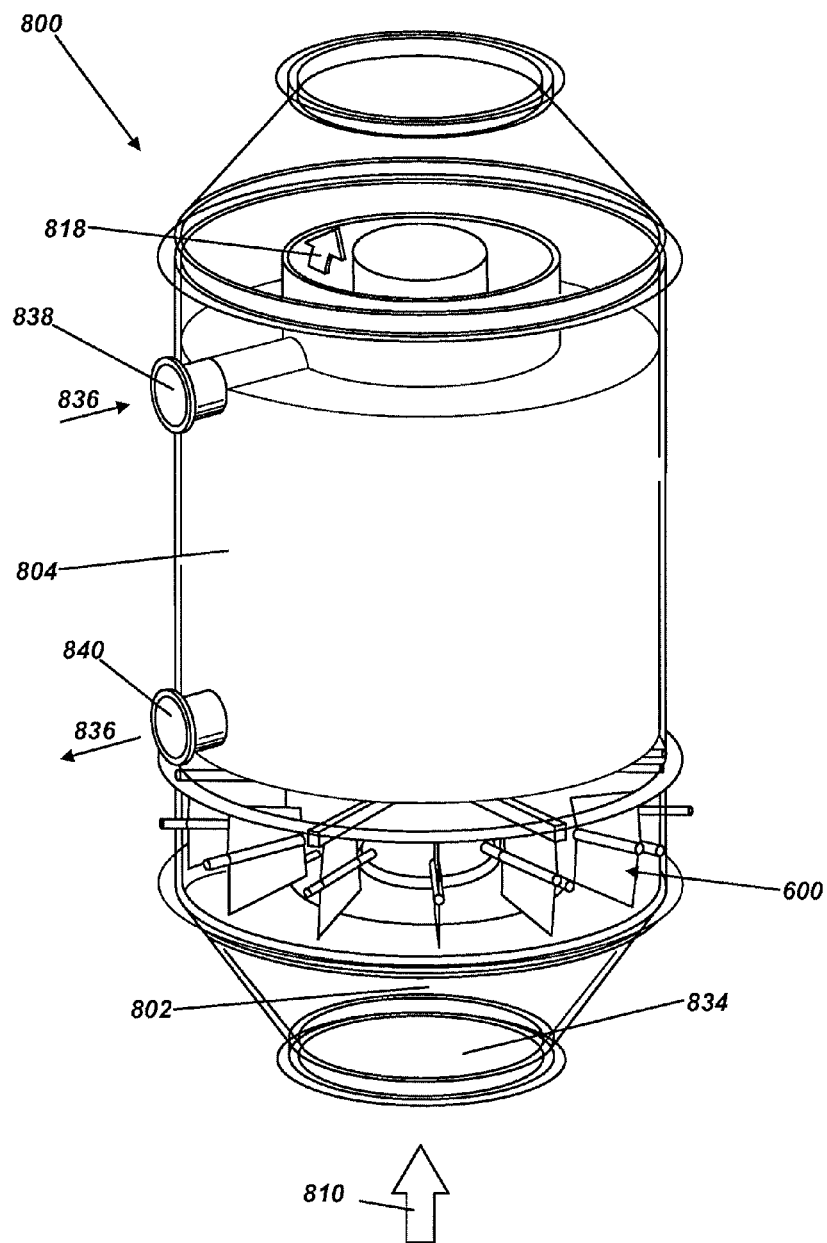


Fig. 8

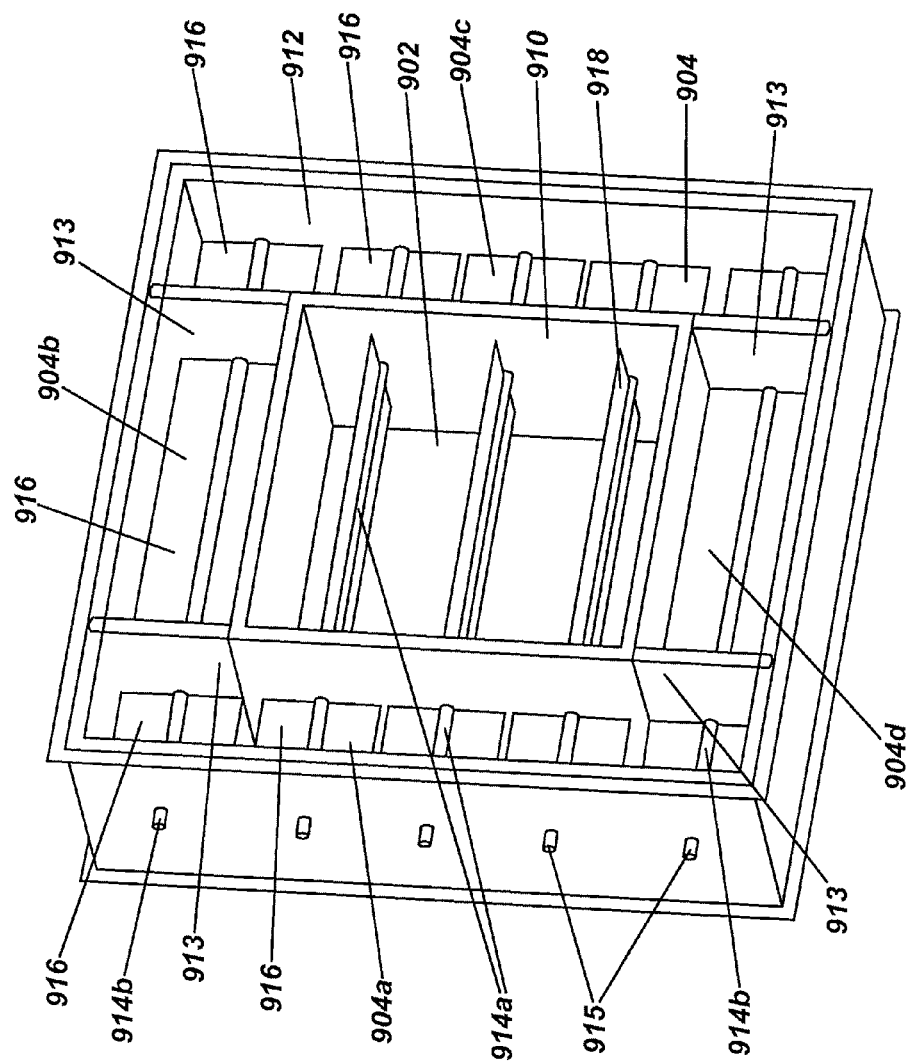
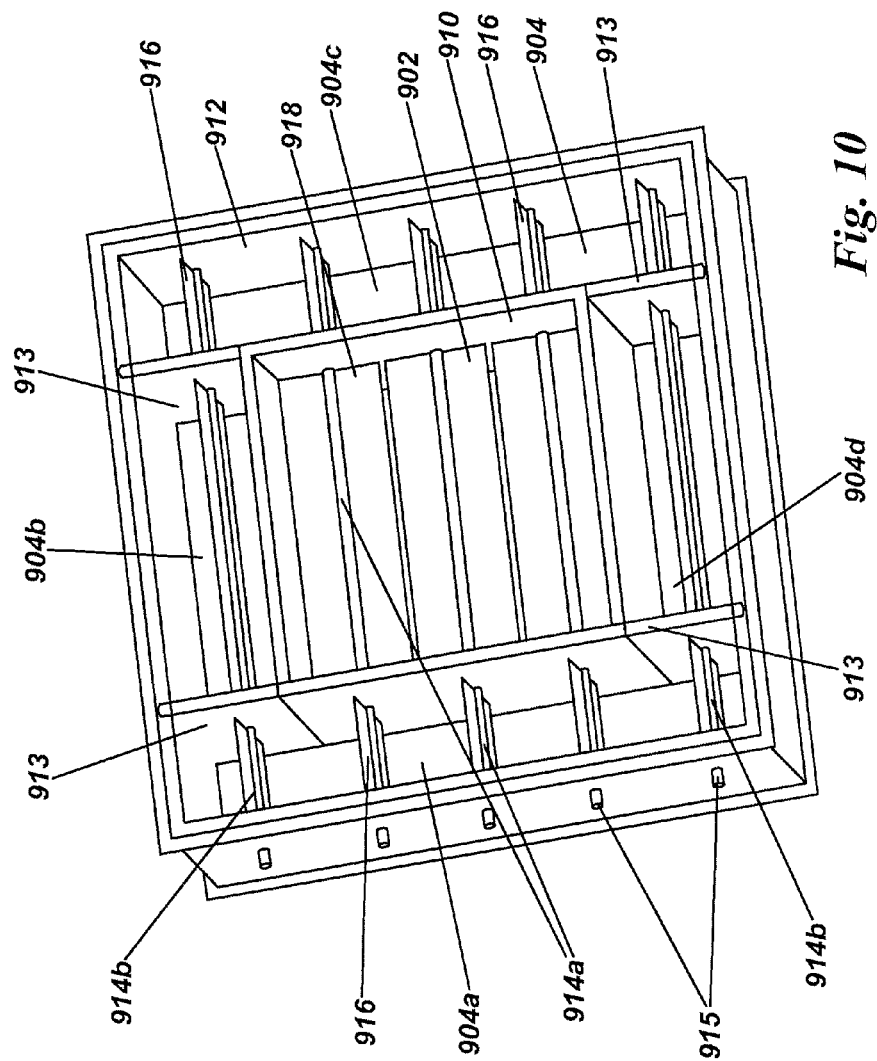


Fig. 9



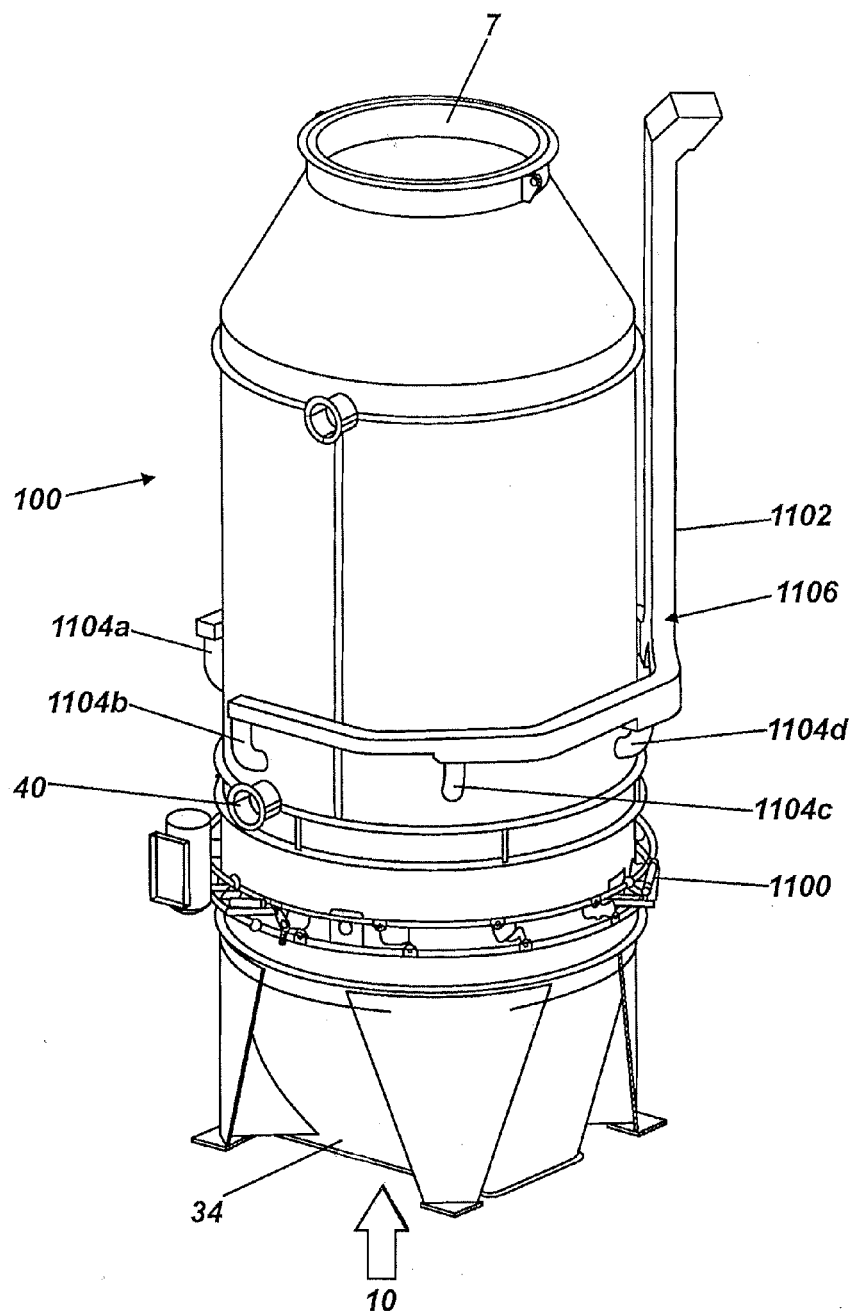


Fig. 11

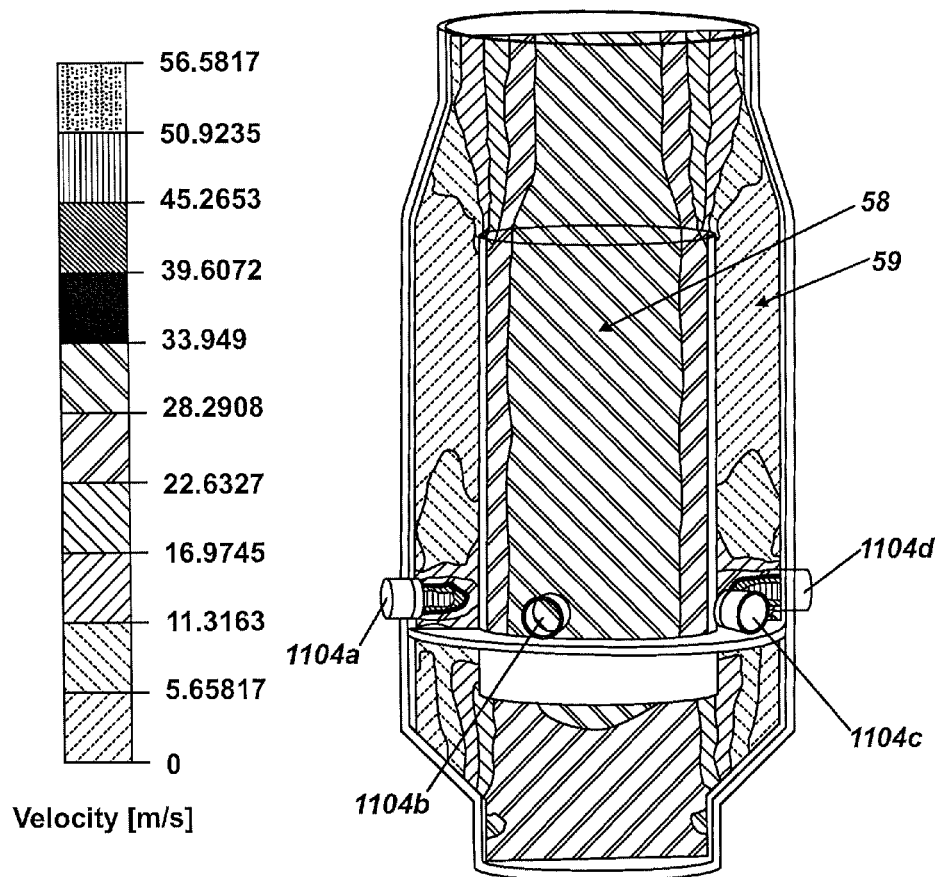
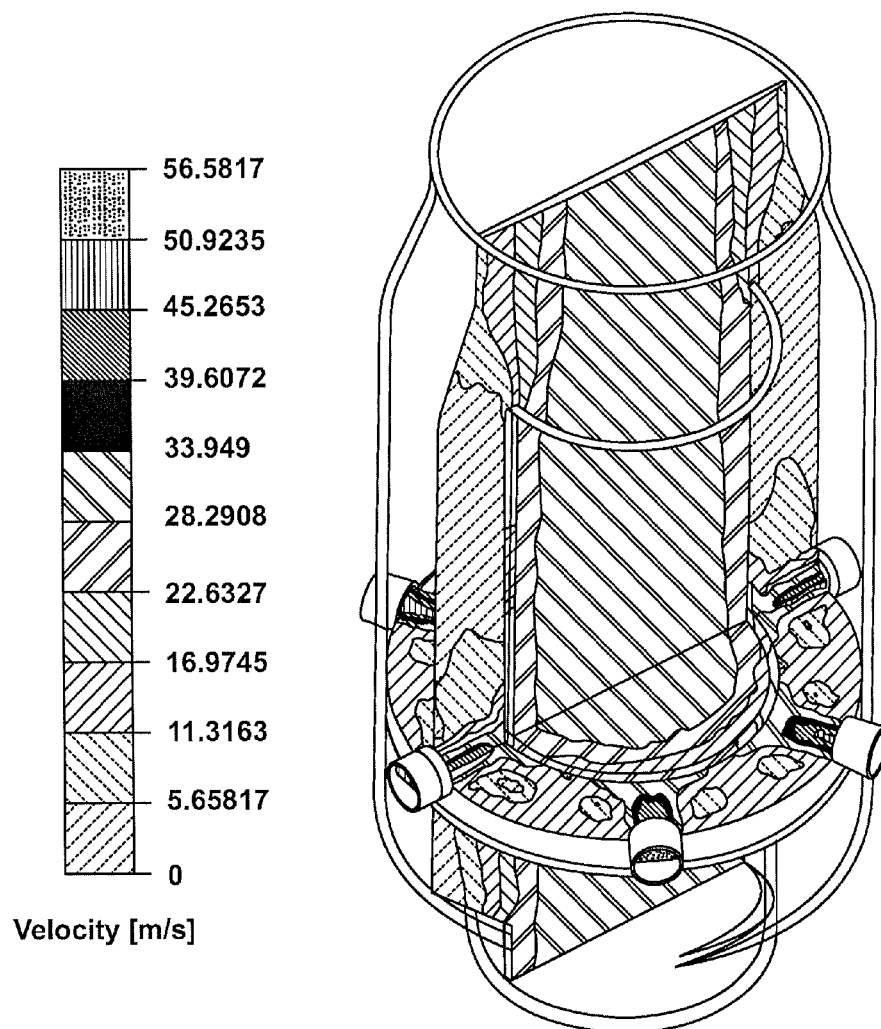


Fig. 12

*Fig. 13*

1

**EXHAUST RECOVERY HEAT EXCHANGER
WITH INLET DAMPER****CROSS-REFERENCE TO RELATED
APPLICATIONS**

This application is the 35 U.S.C. §371 National Phase Application of International Application Serial No. PCT/GB09/050946 filed Jul. 30, 2009, which claims priority of GB Application No. 0813938.8 filed Jul. 30, 2008 and GB Application No. 0822584.9 filed Dec. 11, 2008, the disclosures of both are incorporated herein by reference.

FIELD OF THE INVENTION

This invention relates to heat exchangers. In particular, it relates to heat exchangers having internal bypass arrangements which may be actuated to control the bypass of hot fluid, generally a gas, around a heat exchanger array and to direct fluid flow into a by-pass circuit. In particular, but not exclusively, it relates to heat exchangers associated with gas turbines and gas/diesel engines for extracting heat from their exhaust gases. In particular the invention may relate to the field of industrial plant.

BACKGROUND OF THE INVENTION

Heat exchangers of the type used to recover heat from gas turbine or gas/diesel engine exhaust gas are commonly designed with a bypass circuit situated external to the heat exchanger array and its casing, with the exhaust gas flow to the heat exchanger array circuit and the bypass circuit controlled by at least one flap valve or the like, such valves being known as dampers.

DE 42 07 667 shows a heat exchange unit having a damper in the form of a sleeve valve axially slideable within a casing to open or close the entry to a duct containing a heat exchanger. When the sleeve valve closes the heat exchanger, exhaust gas bypasses the heat exchanger and passes exclusively through the sleeve. However, when the sleeve valve opens the duct, the exhaust gas passes through both the duct and the sleeve.

WO99/64806 also shows a heat exchange unit having a damper in the form of a slideable sleeve. However, the damper is arranged such that, at extreme positions thereof, exhaust gas can be selectively arranged to flow either through a bypass containing a heat exchanger or through a duct bypassing the heat exchanger. However, turbulence at downstream portion of the bypass duct can cause the gas to heat the heat exchanger even though gas is being diverted past the heat exchanger. Moreover, when the gas is being passed into the heat exchanger, the angle through which the gas is caused to move can create a significant pressure drop which can lead to an increased back pressure within the heat exchange unit. The skilled person will appreciate that if the back-pressure becomes too large then an engine feeding the heat exchange unit may not be as efficient as desired. Also, the particular arrangement of the damper means that the damper cannot be tested until the whole unit is assembled which can add to the time to manufacture the unit.

Another damper arrangement is provided in EP1923545A2, where the substantially rigid component surfaces of the damper are triangular in order that they may selectively mesh to seal the bypass duct and separate to seal the heat exchange duct. The disadvantage with this system is that for this damper to work the fluid must flow through triangular holes in the inlet duct to enter the heat exchange

2

duct. The remaining casing surrounding the triangular holes therefore impedes the flow of gas to the heat exchanger even when the damper is positioned to allow gas to enter the heat exchanger.

SUMMARY OF THE INVENTION

According to a first aspect of the invention there is provided a heat exchange unit for heat recovery from hot gas comprising, an inlet duct to which an annular heat exchange duct and an annular bypass duct are connected, one being surrounded by the other, a heat exchange array situated within the heat exchange duct, a central core around which the inner of the bypass and heat exchange ducts is provided and a damper arranged to direct the flow of gas through the unit, such that the damper is situated within the inlet duct and has two extreme positions, such that in a first extreme position the damper substantially seals one of the heat exchange and bypass ducts from the inlet duct and in the other extreme position the damper substantially seals the other of the ducts from the inlet duct.

Such an arrangement is thought to be convenient as it provides a straighter path for fluid flowing therethrough. As such, there is likely to be less of a pressure drop within the gas flow. Heat exchange units are generally specified with a maximum pressure drop across the whole unit and as there is a reduced pressure drop through the damper more pressure drop can be used in the design of the heat exchange array, therefore beneficially reducing the size, weight and cost of the heat exchange array. Additionally the provision of the central core may aid fluid flow, thus reducing back pressure and/or promoting silencing of the fluid flow. The central core may in particular split the fluid flow, directing it so as to impinge on the damper in a more uniform and less turbulent way. It may be that an end region of the central core, on which fluid entering the unit impinges, is hemi-spherically shaped. This may be particularly suitable for advantageously splitting the fluid flow.

According to a second aspect of the invention there is provided a heat exchange unit for heat recovery from hot gas comprising, an inlet duct to which an annular heat exchange duct and an annular bypass duct are connected, one being surrounded by the other, a heat exchange array situated within the heat exchange duct and a damper arranged to direct the flow of gas through the unit, such that the damper is situated within the inlet duct and has two extreme positions, such that in a first extreme position the damper substantially seals one of the heat exchange and bypass ducts from the inlet duct and in the other extreme position the damper substantially seals the other of the ducts from the inlet duct, and where further the inlet duct has substantially the same cross-sectional shape as at least one of the heat exchange duct and the bypass duct.

Such an arrangement is thought to be convenient as it provides a straighter path for fluid flowing therethrough. As such, there is likely to be less of a pressure drop within the gas flow. Heat exchange units are generally specified with a maximum pressure drop across the whole unit and as there is a reduced pressure drop through the damper more pressure drop can be used in the design of the heat exchange array, therefore beneficially reducing the size, weight and cost of the heat exchange array. Additionally consistency in cross-sectional shape of the inlet duct and at least one of the heat exchange duct and the bypass duct is thought to cause lower back pressure and help produce good fluid flow characteristics.

According to a third aspect of the invention there is provided a heat exchange unit for hot gas recovery comprising,

3

an inlet duct to which a heat exchange duct and a bypass duct are connected, one being surrounded by the other, a heat exchange array situated within the heat exchange duct and a damper arranged to direct the flow of gas through the unit, such that the damper is situated within the inlet duct and has two extreme positions, such that in a first extreme position the damper provides a first continuous surface and substantially seals one of the heat exchange and bypass ducts from the inlet duct and in the other extreme position the damper provides a second continuous surface and substantially seals the other of the ducts from the inlet duct.

Such an arrangement is believed to be advantageous since it provides less flow resistance to fluid input to the unit in each of the positions of the damper when compared to the prior art. Fluid entering the unit can flow into each of the heat exchange and bypass ducts across substantially the full cross section of each of those ducts.

It may be that the damper is arranged such that when sealing one of the heat exchange duct and the bypass duct it causes substantially no impediment to fluid flow to the non-sealed duct. This may be advantageous in that a lower back pressure may be present and fluid flow characteristics may be improved.

This may be achieved by the provision of a damper which comprises a damper surface, conveniently supported by a plurality of shafts, a continuous sheet member (conveniently provided by a single sheet but alternatively provided by multiple attached sheets), where the sheet member(s) is corrugated to form a bellows that can deflect without undue stresses when the shafts are moved to different positions. The damper arrangement described may be flexible due to its corrugations, and so its shape may be altered as required to efficiently seal one of the heat exchange duct and the bypass duct.

It may alternatively be that the damper comprises a plurality of sheet members conveniently supported by a plurality of shafts, the sheet members being arranged in a louver. Some of the sheets may be oriented substantially perpendicular to the others. The shafts may be selectively actuated to seal by means of the plurality of sheet members either the heat exchange duct or the bypass duct. The louver arrangement may be advantageous as it may require substantially less space to operate (particularly along the longitudinal axial length through the heat exchanger) and may weigh substantially less when compared to alternative systems such as the damper based on the corrugated sheet member already discussed. This is relevant in certain applications where low weight and a low centre of gravity for the heat exchanger may be advantageous. This is especially true when the heat exchanger is to be used in potentially rough seas on a rig. Here not only does removing weight and lowering the centre of gravity reduce the cost and increase the stability of the heat exchanger, it also has the same effect on the rig, where consequently less supporting structural material will be required.

It may be that the damper has two ducts, one being surrounded by the other, that align with the heat exchange duct and the bypass duct. This may effectively extend the lengths of the heat exchange duct and the bypass duct, and may be a convenient way of sealing and opening only one of the ducts at a time.

It may be that each shaft supports at least two sheet members that are oriented perpendicular to one another. This may allow for simultaneous sealing of one duct and opening of the other, such that fluid flow is prevented through one duct and allowed through the other. Additionally it may allow for degrees of sealing and opening to occur between the extremes of sealed and open. Alternatively it may be that two sheet

4

members supported by a shaft may be oriented at an angle other the 90° to one another, where it is not desirable to completely close one duct while another is open.

It may be that substantially perpendicularly orientated sheet members supported by the same shaft are in separate ducts and that both ducts have only substantially parallel oriented sheet members. Substantially perpendicular sheet members in different ducts may mean that when one duct is sealed the sheet members will provide substantially no impediment to the flow of fluid in the other duct.

It may be that the shafts pass through the ducts to which they are attached by bearings. It may be that the shafts are selectively actuated by rotating their protruding outer ends. This may provide a convenient way of actuating the sheet members.

It may be that the shafts are actuated in unison and that when they are actuated the parallel oriented sheet members in each duct are rotated by the shafts into or out of operative engagement so as to seal one of the heat exchange duct and the bypass duct, and to open the other one.

It may be that each sheet member has one or more ledges at edge regions thereof. It may be that each sheet member has continuous ledges around its perimeter on both its top and bottom surface. The ledges may be advantageous as they may help to create a more effective seal when the sheet members are oriented so as to seal one of the ducts. Ledges on the edge regions of the sheet members may cooperate to seal neighbouring sheet members, while ledges at the ends of the sheet members may seal each sheet member against the duct walls. The ledges may be provided with a sealing material, the material preferably having high elasticity at the operating temperatures of the damper (such as Inconel 625 or Hastelloy).

According to a fourth aspect of the invention there is provided a heat exchange unit for heat recovery from hot gas comprising, an inlet duct to which an annular heat exchange duct and an annular bypass duct are connected, one being surrounded by the other, a heat exchange array situated within the heat exchange duct and a damper arranged to direct the flow of gas through the unit, such that the damper is situated within the inlet duct and has two extreme positions, such that in a first extreme position the damper substantially seals one of the heat exchange and bypass ducts from the inlet duct and in the other extreme position the damper substantially seals the other of the ducts from the inlet duct, the damper comprising a plurality of sheet members conveniently supported by a plurality of shafts, the sheet members being arranged in a louver with sheet members provided in one of the heat exchange duct and the bypass duct being oriented substantially perpendicular to sheet members in the other of the ducts wherein the shafts are arranged to selectively actuated to seal by means of the plurality of sheet members either the heat exchange duct or the annular bypass.

According to a fifth aspect of the invention there is provided a heat exchange unit for heat recovery from hot gas comprising, an inlet duct to which an annular heat exchange duct and an annular bypass duct are connected, one being surrounded by the other, a heat exchange array situated within the heat exchange duct and a damper arranged to direct the flow of gas through the unit, such that the damper is situated within the inlet duct and has two extreme positions, such that in a first extreme position the damper substantially seals one of the heat exchange and bypass ducts from the inlet duct and in the other extreme position the damper substantially seals the other of the ducts from the inlet duct.

Such an arrangement is thought to be convenient as it provides a straighter path for fluid flowing therethrough. As

5

such, there is likely to be less of a pressure drop within the gas flow. Heat exchange units are generally specified with a maximum pressure drop across the whole unit and as there is a reduced pressure drop through the damper more pressure drop can be used in the design of the heat exchange array, therefore beneficially reducing the size, weight and cost of the heat exchange array.

Conveniently, the damper may comprise a frusto conical shell when in the first extreme position. Further, the damper may comprise a substantially cylindrical shell when in the second extreme position. In other embodiments, the damper may comprise a shell having any other cross section, such as oval, square, rectangular, etc. If the cross section of the unit were changed from circular, it is likely, but not essential, that the cross section of the damper may also be changed when in the second extreme position.

The damper may comprise a damper surface which is conveniently supported by a plurality of shafts. Such a damper surface may be a convenient way in which to provide a fluid tight seal.

The damper surface may be provided by a single sheet member. Alternatively, the damper surface may be provided from a plurality of sheet members.

The or each sheet members may be corrugated to form a bellows that can deflect without undue stresses when the shafts are moved to different positions. Generally the corrugations are such that the corrugations lie substantially parallel to a longitudinal axis of the unit. Such an arrangement conveniently allows the damper to move between the two extreme positions.

Conveniently, each corrugation is radiussed, as opposed to being a fold. Such an arrangement is convenient since it can help reduce stress raisers (or stress concentrations) within the damper which can help to prolong the life of the damper.

The or each sheet members may be laminated. At least one lamination may be of a thermally and/or acoustically insulating material. Such members may be advantageous through tailorable thermal or acoustic transfer properties. Conveniently, any shafts that form the damper are equi-spaced around the damper.

The unit may comprise a damper moving mechanism arranged to move the damper between the two extreme positions. The damper moving mechanism generally allows the damper to take one or more positions between the two extreme positions. In some embodiments, these positions may be discrete positions whilst in other embodiments the position of the damper may be substantially infinitely variable between the two extremes.

The mechanism may conveniently comprise a ring to which each shaft is linked. The ring may be linked to each shaft via a linkage, which comprise a rod like member.

The ring may be driven by one or more actuators.

In other embodiments, the damper may have other constructions. For example, the damper may comprise a plurality of sub-components. The sub-components of the damper may be arranged in a clam shell type arrangement, such that in the closed condition the first extreme position is provided (ie fluid flows through one of the bypass duct and the heat exchange duct) and in the open condition the second extreme position is provided (ie fluid flows through the other of the ducts).

Conveniently, the heat exchange duct and the bypass duct are concentric with one another.

In at least some embodiments, a central core may be provided around which the inner of the bypass and heat exchange ducts is provided.

6

An end region of the central core may provide baffle upon which fluid, entering the unit, impinges. Such a baffle may aid fluid flow and/or silencing of the fluid flow.

The central core may be arranged to provide a valve seat against which the damper seals when in the first extreme position. The valve seat may comprise an indentation in the central core.

In some embodiments an air blast may be provided to aid sealing of the damper against the central core.

An outer casing of the unit may provide a valve seat against which the damper seals when in the second extreme position. Conveniently, the outer casing comprises a step which provides the valve seat.

In one embodiment, the inner of the annular ducts provides the heat exchange duct and the outer of the annular ducts provides the bypass duct. Such an arrangement is perhaps convenient because it can help to reduce the diameter of coils used in the heat exchange array as well as providing a direct route to the heat exchange array with minimum pressure drop. The skilled person will appreciate that this has resultant advantages that the space required to handle, store and ship is reduced. Further, the size of the tools required to make the coils is also reduced thereby further reducing costs. Further, surrounding the heat exchange duct with the bypass duct increases the insulation of the heat exchange duct from the atmosphere which can help to reduce heat loss and thereby increase efficiency.

In an alternative embodiment, the inner of the annular ducts provides the bypass duct and the outer of the annular ducts provides the heat exchange duct.

The heat exchange array may comprise helically coiled tubes and/or finned tubes. However the array may take any form that can be conveniently located in the heat exchange duct. For example tubes running longitudinally from a first end region (which may be the top) to a second, distal, end region (which may be the bottom) of the heat exchange duct, with exhaust gas flowing either inside the tubes or outside the tubes, with process fluid flowing on the other side of the tubes.

According to a sixth aspect of the invention there is provided a heat exchange unit for heat recovery from hot gas comprising, a heat exchange duct and bypass duct, heat exchange array situated within the heat exchange duct and damper arranged to direct the flow of gas; wherein the bypass duct surrounds the heat exchange duct and the damper has two extreme positions, such that in a first position gas flow passes through the bypass duct and in the other extreme position gas flow passes through the heat exchange duct and thereby flows through the heat exchange array.

According to a seventh aspect of the invention there is provided a damper arranged to provide a fluid impermeable barrier which comprises a plurality of shafts wherein upon each shaft there is mounted at least two sheet members, the damper further comprising an inner duct and an outer duct, wherein at least one sheet member is provided within each of the inner and outer ducts such that each of these sheet members is mounted substantially perpendicularly to the other.

According to a eighth aspect of the invention there is provided a damper arranged to provide a fluid impermeable barrier which moves from a frusto conical arrangement when in a first extreme position to a substantially cylindrical arrangement when in a second extreme position.

The damper of the sixth or seventh aspect of the invention may be suitable for use in the heat exchange unit of any of the earlier aspects of the invention. However, in other embodiments, the damper may be used in embodiments which are not

related to heat exchange. For example, such a damper may be utilised to direct flow of fluid selectively between two concentric pipes.

The dampers may have any of the features described in relation to the earlier aspects of the invention.

According to an ninth aspect of the invention there is provided a heat exchange unit for hot gas recovery comprising, an inlet duct to which a heat exchange duct and a bypass duct are connected, one being surrounded by the other, a heat exchange array situated within the heat exchange duct and a damper arranged to direct the flow of gas through the unit, such that the damper is situated within the inlet duct and has two extreme positions, such that in a first extreme position the damper substantially seals one of the heat exchange and bypass ducts from the inlet duct and in the other extreme position the damper substantially seals the other of the ducts from the inlet duct.

According to a tenth aspect of the invention there is provided a heat exchange unit for hot gas recovery comprising an inlet duct to which a heat exchange duct and a bypass duct are connected, one being surrounded by the other, a heat exchange array situated within the heat exchange duct and a damper arranged to direct the flow of gas through the unit, such that the damper is situated within the inlet duct and has two extreme positions, such that in a first extreme position the damper substantially closes one of the heat exchange and bypass ducts whilst leaving substantially the full cross section of the other exposed and in the second extreme position substantially closes the other of the heat exchange and bypass ducts whilst leaving substantially the full cross section of the other exposed.

According to a eleventh aspect of the invention there is provided a heat exchange unit arranged to recover heat from hot gas, the unit comprising a heat exchange duct and a bypass duct which are selectively closable, and at least one of the ducts having one or more fluid intakes thereinto each of which is arranged such that when that duct is substantially closed and fluid flows through the other of the ducts, fluid is drawn through the intake(s) and into that duct.

Such an arrangement may be convenient because it can help to prevent overheating of the closed duct. As such, fluid drawn into the closed duct may thought of as a cooling fluid arranged to cool the closed duct.

In one embodiment, it is the heat exchange duct that has the or each intake positioned therein. The heat exchange duct may have positioned therein a heat exchange array arranged to remove heat from hot air passing through the array. Thus, when the heat exchange duct is closed (ie substantially no hot gas enters from an inlet duct) air may be induced to flow into the heat exchange duct from the or each intake. Such induced flow may help residual heat to be removed from the heat exchange duct and/or the heat exchange array which may prevent damage thereto.

In other embodiments it may be the bypass duct or both ducts in which the or each intakes are positioned.

There may be provided a plurality of intakes which may be provided around the or each duct. The intakes may be provided equi-spaced around the duct.

In one embodiment, there are provided six intakes around the or each duct. In other embodiments, there may be provided 1, 2, 3, 4, 5, 7, 8, 10, 20 ducts, or any number in between around the or each duct.

The or each intake may be connected via a conduit. The conduit may be arranged to supply fluid to the or each intake. The fluid may be air.

Conveniently, the or each intake and the conduit are arranged such that fluid is drawn through them by a negative

pressure created within the duct into which the intakes connect. The negative pressure may be created by a Venturi effect of fluid flowing through the duct other than the duct that is closed; for example should the intakes protrude into the heat exchange duct which is substantially closed then fluid flowing through the bypass duct may be arranged to cause a negative pressure in the heat exchange duct thereby drawing fluid through the or each intake.

A flow control mechanism may be provided within the conduit and arranged to control the flow of fluid therethrough.

According to an twelfth aspect of the invention there is provided a heat exchange unit comprising a duct therethrough and being arranged to induce, using a Venturi effect, surrounding air into the duct.

It will be understood that the invention is not limited by the discussion in relation to separate aspects. Any of the features may be employed separately or in combination with any other features discussed anywhere in the specification, and the invention extends to and includes all combinations and sub-combinations of one or more features described herein in any form of heat exchange system.

BRIEF DESCRIPTION OF THE DRAWINGS

There now follows by way of example only a detailed description of the present invention with reference to the accompanying drawings in which

FIG. 1 shows a cross section through a heat exchanger according to one embodiment of the invention with a damper in a bypass position in a first configuration;

FIG. 2 shows a cross section through the heat exchanger of FIG. 1 with the damper in a heat exchange position (which may be termed an open to coil position) which provides a second, different, configuration;

FIG. 3 shows further detail of a corrugated damper showing a push rod and ring beam mechanism that can be used to move the damper;

FIG. 4 shows a section of the corrugated damper of FIG. 3 with top pivot and bellows arrangement;

FIG. 5 shows further detail of control mechanism for the damper as shown in earlier Figures from which, for reasons of clarity, the damper has been omitted;

FIG. 6 is perspective view of a louver damper arrangement shown in a heat exchange position (which may be termed an open to coil position);

FIG. 7 shows the louver damper arrangement of FIG. 6 in the bypass position;

FIG. 8 shows the louver damper arrangement of FIG. 6 positioned in a heat exchanger;

FIG. 9 shows an alternative louver damper arrangement in a heat exchange position (which may be termed an open to coil position);

FIG. 10 shows an alternative louver damper arrangement in a heat exchange position (which may be termed an open to coil position);

FIG. 11 shows a further embodiment of the invention; and FIGS. 12 and 13 show details of the rate of fluid flow through the embodiment of FIG. 11.

DETAILED DESCRIPTION OF THE DRAWINGS

The heat exchange units 100 shown in the Figures are exhaust gas heat recovery units suitable for use, e. g., in the off shore oil and gas industries. Other fields of use are equally possible and the invention is not limited to the oil and gas industries. The damper described herein may have wider applicability outside the field of heat exchange units.

The units **100** are generally cylindrical in shape and are drawn with their major axes oriented vertically. As indicated in FIG. 1, such a unit is intended to receive hot gas **10** through gas inlet duct **34** from a gas turbine engine or other type of engine (not shown), cool the gas as required by heat exchange with a fluid circulating in a heat exchanger array **2**, and pass the cooled gas **18** onwards for venting from the gas exit duct **7** to the atmosphere, a stack, or for further use. The heat exchange fluid **36** is passed in and out of the heat exchanger array **2** via an inlet pipe **38** and an outlet pipe **40**. Generally the inlet is at the top of the heat exchange array and outlet at the bottom, however these may be reversed in certain instances and if multiple heat exchange arrays are installed in the same heat exchange duct then they may be configured differently. The heat exchange array may be used for heating process fluid such as water, thermal fluids, air, gas or for generating steam, or the like.

Referring to FIGS. 1 and 2 together, the heat exchange unit **100** comprises a generally cylindrical outer casing or shell **1**, containing an annular heat exchanger array **2**, a damper **50** moveable between two extreme positions and a baffle **52** situated within the inlet duct **34**.

The annular heat exchange array **2** is provided around a central core **54** which is provided at a central region of the unit, along a longitudinal axis thereof. A fluid impermeable wall **56**, fabricated from a material such as sheet or plate steel (generally stainless steel for temperature resistance), is formed around the heat exchange array **2**. The diameter of the wall **56** is less than that of the outer casing **1** and as such, an annular fluid passage **58**, which in this embodiment may be termed a by-pass duct, is formed between the wall **56** and the outer casing **1**.

Thus, two ducts are formed; the annular by-pass duct **58** between the casing **1** and the wall **56** and an annular heat exchange duct between the wall **56** and the central core **54**. As such, the by-pass duct surrounds the heat exchange duct and is concentric therewith. Each of these ducts communicates with the connects to the inlet duct **34** so that fluid entering the unit can be passed through either or both of the by-pass **58** and heat exchange ducts **59**.

In other embodiments, there may be no central core and as such the inner of the two ducts may be cylindrical rather than annular. Thus, in the embodiment being described, the heat exchange duct would be circular in cross-section if there were no central core.

In FIG. 1, the damper **50** is shown in its first extreme position which in the embodiment being described may be considered a bypass position in which hot gas **10** entering the unit **100** is directed, by the damper **50**, to flow through the annular fluid passage **58**. It will be seen that in this arrangement the damper **50** provides a frusto-cone which presents a substantially continuous surface to fluid entering the unit **100** substantially closing the heat exchange duct but leaving substantially the full cross section of the bypass duct exposed for hot gas to flow into.

As explained hereinafter, a mechanism holds an outer edge region **60** of the damper **50** against the baffle **52** which provides sufficient seal for most purposes to prevent hot gas **10** entering the heat exchange array **2**. However if further sealing is required a seal such as a resilient material etc, may be provided on an indented step **500** in a bottom region of the baffle **52** to seal against the outer end of region **60**.

In some embodiments an air blast system (not shown) may be provided in order to further prevent any hot gas **10** entering the heat exchange array **2** and in such embodiments, it should be possible to prevent any hot gas **10** from entering the heat exchange array **2**, forming substantially a 100% seal.

In FIG. 2, the damper **50** is shown in its second extreme position which in the embodiment being described may be considered a heat exchange position in which the outer end region **60** thereof is held against the outer casing **1**. In this arrangement hot gas **10** entering the unit **100** is directed to flow through the heat exchange duct and therefore through the exchange array **2**. In this arrangement, it will be seen that the damper **50** also provides a substantially continuous surface which in this case is substantially cylindrical and substantially blocks the bypass passage whilst leaving substantially the full cross section of the heat exchange duct exposed for hot gas to flow therethrough. As such fluid entering the unit **100** is provided with a generally straight passage through the unit.

In the heat exchange position, the damper **50** adopts a substantially cylindrical arrangement and it will be seen that the outer casing **1** has a step **62** adjacent the inlet duct **34**. As can be seen in FIG. 2, when the damper **50** is in the heat exchange position, the outer end region **60** thereof, is arranged such that the step shields the outer end region **60** from the hot gas **10** entering the inlet duct **34** and thereby the step **62** acts as a valve seat for the damper. As such, substantially all hot gas **10** is directed through the heat exchange array **2** whilst the damper **50** is in the heat exchange position. However, if further sealing is required a seal, such as a resilient material, etc. may be provided on the step **62** in order to seal against the outer end region **60**. If 100% seal is required then an air blast system may be installed to prevent any exhaust gas leaking to the bypass duct.

In other embodiments, the damper **50** may take other cross sectional shapes when in the second extreme position.

A damper moving mechanism is provided in order to move the damper **50** between the two extreme positions and as can be seen in FIGS. 1 and 3 beams **300** are attached, possibly by welding, adhering or the like, to each corrugation of the damper **50**. Each beam **300** has a hole **302** through a lower end region **304** to which a push rod **306** is attached by a pin **308** or other means, which allows the joint to rotate. The other end, which may be referred to as an upper end region **310**, of each push rod **306** has a hole **312** therethrough which is passed over a lug **314** on a concentric ring beam **316** which is mounted within the unit **100** concentrically with the casing **1**. This arrangement for mounting the upper end region **310** of the push rod **306** on the ring beam **316** allows relative rotational motion between the rod **306** and the beam **316**. The push rod **306** may be thought of as a linkage between each beam **300** and the ring **316**.

As can be best seen from FIG. 5, the baffle **52** comprises an indentation **500** of complimentary shape to receive the outer edge region **60** of the damper **50** which thereby provides a valve seat for the damper. Such an indentation **500** can aid sealing of the damper **50** whilst in the first configuration as shown in FIGS. 1 and 5.

The ring beam **316** is of fixed diameter, and concentric with the longitudinal axis of the unit **100**, in this embodiment, the ring beam **316** is connected to three control rods **72** (one of which can be seen in the Figures) which pass out through a region of the casing adjacent the inlet duct **34** via gas seals (not shown) and in this embodiment, this is conveniently through the step **62**. In other embodiments, more or less than three control rods **72** may be provided.

The distal end regions of the control rods **72**, away from the damper **50**, are connected to actuators **102** which are commonly hydraulic or pneumatic cylinders. However, any other suitable actuators such as electrical, or manually operated may be used.

11

A guide is provided on the casing within the annular fluid passage **58** for each of the control rods **72** and arranged to guide each control rod **72** during operation thereof, to help ensure the ring beam **316** can only move along the unit's **100** main longitudinal axis and remains perpendicular to that main axis.

As can be best seen in FIGS. **3** and **4**, a top end region **400** of beam **300** is pivotably mounted upon a support ring **402**. As can be best seen in FIG. **4** a series of flanges **404** depend from an underside thereof. Each of these flanges **404** has pivotally connected thereto a beam **300**. In particular, in the embodiment shown, two flanges **404** have sandwiched therebetween a single beam **300** although this need not be the case in other embodiments.

The support ring **402** comprises a lower flange **406** and each of the beams **300** comprises an upper flange **408** which together form a ring concentric with the unit **100**. An annular bellows **410** is provided between the lower flange **406** and the ring formed by the upper flanges **408** thereby providing a fluid tight seal between a core region **412** of the damper **50** and an outer region **414** of the damper.

Mounted onto each of the beams **300** is a damper surface **416** which provides the surface that seals off either the heat exchange duct or the bypass duct depending on whether the damper **50** is in the first or second extreme position. In some embodiments the damper surface **416** is provided by a plurality of sheet members, each of which is fastened to a beam **300**. In other embodiments, the damper surface **416** is provided by a single sheet which is shaped and corrugated as necessary for it to move between the bypass and heat exchange positions. Such a damper may conveniently be thought of as having the shape of a corrugated lamp shade and FIG. **4** shows this in more detail.

The baffle **52** is provided within a central region of, and axially aligned with, the gas inlet duct **34** and comprises a generally hemispherical end region concentric with the outer casing **1**. The baffle **52** acts as a flow splitter and has a cylindrical upper portion which provides the central core **54**.

To provide improved sound attenuation in the annular bypass fluid passage **58**, the outer surface of the wall **56** and an inner surface of the outer casing **1** have a sound attenuating lining over at least part of their length.

For noise absorption within the heat exchanger array, sound attenuation linings are provided respectively on an outside of the central core **54** and on an inside of the wall **56**.

The sound attenuation linings also have a temperature insulating function to reduce heat loss through the walls of the heat exchanger duct and the outer casing.

In operation, the position of the damper **50** is controlled in order that the temperature of the heat exchange fluid **36** is maintained at a desired temperature. To this end, the control rods **72** are actuated in order to control the amount of hot gas passing through the heat exchange array **2**, which can vary between substantially all of the hot gas **10** entering the unit when the damper **50** is as shown in FIG. **2** to substantially none of the gas **10** when the damper **50** is as shown in FIG. **1** through any amount between these two extremes by positioning the damper **50** at intermediate positions.

Although FIGS. **1** and **2** show the damper **50** in its two extreme positions, it should of course be understood that the position of the damper is variable according to the input from the rods **72**, so that intermediate positions could be adopted, thereby allowing some of the hot gas **10** to pass through the annular fluid passage **58** and some through the heat exchanger array **2**.

Referring now to FIGS. **6** and **7** an alternative damper arrangement is provided generally at **600**. The damper **600**

12

has inner **602** and outer **604** ducts, the inner **602** being surrounded by the outer **604**. The inner **602** and outer **604** ducts align with the heat exchange duct (not shown) and the bypass duct (not shown) respectively of a heat exchanger **800** (shown in FIG. **8**) effectively extending their lengths. At the centre of the inner duct **602** is a baffle **606**. Baffle **606** is provided within a central region of, and axially aligned with, the gas inlet duct **802** and comprises a generally hemispherical end region concentric with the outer casing **804** of the heat exchanger **800**. The baffle **606** acts as a flow splitter and has a cylindrical upper portion which provides a central core **608**. The inner duct **602** is defined between the central core **608** and an inner duct wall **610**. The outer duct **604** is defined between the inner duct wall **610** and an outer duct wall **612**.

A plurality of shafts **614** are provided that extend radially through the damper **600**, passing through the outer duct wall **612**, through the outer duct **604**, through the inner duct wall **610**, through the inner duct **602** and into the central core **608**. The shafts **614** are provided at regular intervals around the circumference of the damper **600**. Suitable openings (not shown) are provided for the passage of the shafts **614** in the central core **608**, inner duct wall **610** and outer duct wall **612**. The openings (not shown) are also suitable for receiving and retaining a bearing (not shown) such as a glacier bearing. The bearings (not shown) mean that the shafts **614** may be rotated about their longitudinal axes. An extending portion **615** of each of the shafts **614** extends radially outwards beyond the outer duct wall **612**. The extending portion **615** is attached to an actuation mechanism (not shown), such as a lever or the like for rotating substantially simultaneously all of the shafts **614**. However, any suitable mechanism may be employed, such as a gear provided on an end region of the shaft, etc.

Attached, perhaps by welding or the like, to each shaft **614** is a pair of sheet members of stainless steel, one housed in the outer duct **604** (outer sheet member **616**) and the other housed in the inner duct **602** (inner sheet member **618**). The set of sheet members in each duct **602**, **604** produces a louver arrangement. The outer sheet member **616** and inner sheet member **618** on each shaft **614** are welded positioned with the shaft **614** so as to be orientated substantially perpendicular to one another. The sheet members **618** in each duct (inner **602** and outer **604**) are however similarly orientated.

As shown in FIG. **6**, which shows a first extreme position of the damper, the outer sheet members **616** are shaped such that when the shafts **614** are rotated appropriately the outer sheet members **616** cooperate to produce a substantially continuous surface. When the shafts are so arranged, the sheet members **618** within the inner duct are oriented substantially parallel to the direction of fluid flow being substantially perpendicularly the sheets members within the outer duct. Thus, in this first extreme position the outer duct **604** is substantially sealed whereas the inner duct **602** remains open. As such, the outer duct **604** is closed by a substantially continuous surface.

As shown in FIG. **7**, which shows a second extreme position of the damper, the inner sheet members **618** are shaped such that when the shafts **614** are rotated appropriately the inner sheet members **618** cooperate to produce a substantially continuous surface. When the shafts are so arranged, the sheet members **616** within the outer duct are oriented substantially parallel to the direction of fluid flow being substantially perpendicularly the sheet members within the inner duct. Thus, in this second extreme position the inner duct **602** is substantially sealed whereas the outer duct **604** remains open. In this position the inner duct **602** is sealed by a substantially continuous surface.

Although not shown here, in other embodiments the sheet members are provided with perimetrical ledges at their edges.

13

The ledges are attached, perhaps by welding, onto the sheet and are shaped so as to create a seal between neighbouring sheet members and between each sheet member and the central core **608** and inner duct wall **610** or the inner duct wall **610** and outer duct wall **612** as appropriate. Additionally the ledges may be provided with a sealant having high elasticity at the operating temperatures of the damper **800** (such as Inconel 625 or Hastoloy).

Referring specifically now to FIG. 8 the heat exchanger **800** is shown. The heat exchanger is similar in design to the heat exchanger **100** of FIG. 1. The heat exchanger **800** is generally cylindrical in shape and is drawn with its major axes oriented vertically. It is intended to receive hot gas **810** through gas inlet duct **834** from a gas turbine engine or other type of engine (not shown), cool the gas as required by heat exchange with a fluid circulating in a heat exchanger array (not shown), and pass the cooled gas **818** onwards for venting from the gas exit duct **807** to the atmosphere, a stack, or for further use. The heat exchange fluid **836** is passed in and out of the heat exchanger array (not shown) via an inlet pipe **838** and an outlet pipe **840**. Generally the inlet is at the top of the heat exchange array and outlet at the bottom, however these may be reversed in certain instances and if multiple heat exchange arrays are installed in the same heat exchange duct then they may be configured differently. The heat exchange array may be used for heating process fluid such as water, thermal fluids, air, gas or for generating steam, or the like. The heat exchanger **800** differs from the heat exchanger **100** in that it utilises the damper **600** in place of damper **50**.

In operation, the arrangement of the damper **800** is controlled in order that the temperature of the heat exchange fluid **836** is maintained at a desired temperature. To this end, the shafts **614** are actuated via rotation of the extending portions **615**, in order to control the amount of hot gas passing through the heat exchange array (not shown), which can vary between substantially all of the hot gas **810** entering the unit when the damper **600** is as shown in FIG. 6 to substantially none of the gas **810** when the damper **600** is as shown in FIG. 7 through any amount between these two extremes by rotating the extending portions **615** such that the outer **616** and inner **618** sheet members are orientated in intermediate positions.

Although FIGS. 6 and 7 show the damper **600** in its two extreme positions, it should of course be understood that the position of the damper is variable according to the input from the shafts **614**, so that intermediate positions could be adopted, thereby allowing some of the hot gas **810** to pass through the bypass duct (not shown) and some through the heat exchanger duct (not shown).

Referring now to FIGS. 9 and 10 a damper **900** is shown which is similar in operation and principal to damper **600**. The purpose of FIGS. 9 and 10 is to show how the louver principal may be extended to dampers with non-circular cross-sections. In this case a square cross section.

The damper **900** has inner **902** and outer **904** ducts, the inner **902** being surrounded by the outer **904**. The inner **902** and outer **904** ducts align with the heat exchange duct (not shown) and the bypass duct (not shown) respectively of a heat exchanger having a square intake. This embodiment does not have a baffle at the centre of the inner duct **902**, but this could easily be incorporated. The inner duct **902** is defined as the area within an inner duct wall **910**. The outer duct **904** is defined between the inner duct wall **910** and an outer duct wall **912**. Four additional structural walls **913** are also provided, required to secure the inner duct wall **910**. These structural walls **913** divide up four portions of the outer intake duct **904a**, **904b**, **904c** and **904d**.

14

A plurality of shafts **914a** are provided that extend through the damper **900**, passing through the outer duct wall **912**, through the outer duct **904**, through the inner duct wall **910**, through the inner duct **902**, through the inner duct wall **910**, through the outer duct **904** and through the outer duct wall **912**. Additionally a plurality of shafts **914b** are provided that extend through the damper **900**, passing through the outer duct wall **912**, through the outer duct **904** (including through two of the structural walls **913**) and through the outer duct wall **912**. The shafts **614** are provided at regular intervals through the damper **900**. Suitable openings (not shown) are provided for the passage of the shafts **914a** and **914b** in the inner duct wall **910**, outer duct wall **912** and structural walls **913**. The openings (not shown) are also suitable for receiving and retaining a bearing (not shown) such as a glacier bearing. The bearings (not shown) mean that the shafts **914** may be rotated about their longitudinal axes. An extending portion **915** of each of the shafts **914a** and **914b** extends longitudinally outwards beyond the outer duct wall **912**. The extending portion **915** is attached to an actuation mechanism (not shown), such as a lever for rotating substantially simultaneously all of the shafts **914a** and **914b**. However, any suitable mechanism may be employed, such as a gear provided on an end region of the shaft, etc.

Attached, perhaps by welding, to each shaft **914a** are three sheet members of stainless steel, two housed in the outer duct **904** (outer sheet members **916**) and the other housed in the inner duct **902** (inner sheet member **918**). Attached, perhaps by welding, to each shaft **914b** are three sheet members of stainless steel, each housed in the outer duct **904** (outer sheet members **916**) but separated by structural walls **913**. The set of sheet members in each duct **902**, **904** produces a louver arrangement. All outer sheet members **916** are orientated substantially parallel to one another and all inner sheet members **918** are orientated substantially parallel to one another. Outer sheet members **916** and inner sheet members **918** are however orientated substantially perpendicular to one another. As shown in FIG. 8, the outer sheet members **916** are shaped such that when the shafts **914a** and **914b** are rotated so as the outer sheet members **916** in the outer duct **904** present their large surfaces to a fluid entering the outer duct **904**, the outer sheet members **916** cooperate to produce a substantially continuous surface. As shown in FIG. 9, the inner sheet members **918** are shaped such that when the shafts **914a** are rotated so as the inner sheet members **918** in the inner duct **902** present their large surfaces to a fluid entering the inner duct **902**, the inner sheet members **918** cooperate to produce a substantially continuous surface. Although not shown here, in other embodiments the sheet members are provided with perimetrical ledges at their edges. The ledges are welded onto the strip and are shaped so as to create a seal between neighbouring sheet members and between each sheet member and the inner duct wall **910**, outer duct wall **912** and the structural walls **913** as appropriate. Additionally the ledges may be provided with a sealant having high elasticity at the operating temperatures of the damper **900** (such as Inconel 625 or Hastoloy).

FIGS. 11 to 13 describe a further embodiment of the invention and again, like parts are referred to with like reference numbers.

A heat exchange unit **100** is shown with an inlet duct **34** into which hot gas **10** enters. Gas that has passed through the heat exchange unit **100** exits through the gas exit duct **7**. The outlet pipe **40** from the heat exchange array (not seen in Figure) is shown as is a mechanism **1100** arranged to control a damper which may be as described in relation to any of the preceding Figures.

15

Additionally, a conduit **1102** which supplies, in this embodiment, six intakes **1104** (four of which can be seen in the figures and are labelled **1104 a** to **d**) equispaced around the perimeter of the unit **100**.

In the embodiment being described the unit **100** is arranged in a manner which is configured in an opposite manner to that shown in FIG. **1**, having a bypass duct **58** in a central region which is surrounded by a heat exchange duct **59**. These are highlighted in FIG. **12** which shows a cross section through the embodiment of FIG. **11**.

The heat exchange duct has positioned therein a heat exchange array **2**. A damper is provided within the unit which can selectively close the heat exchange duct or the bypass duct and is controlled by the mechanism **1100** which is seen around the outside of the unit **100** in FIG. **11**.

Each of the intakes **1104** extends into the heat exchange duct. A flow control mechanism **1106** is positioned within the conduit **1102** such that the conduit can be selectively closed or opened.

The arrangement is such that when the unit **100** is operated with the heat exchange duct fully closed by the damper (and therefore with substantially 100% of the hot gas **10** flowing through the bypass duct through a central region of the unit) the flow control mechanism **1106** is opened thereby allowing air to pass through the conduit **1102**. Thus (and referring to FIG. **12**) hot air passing through the bypass duct **58** passes the exit of the heat exchange duct **59** and thereby creates a negative pressure in the heat exchange duct **59** by the Venturi effect.

Since the fluid control mechanism **1106** is open air is drawn through the conduit **1102** via the intakes **1104** into the heat exchange duct **1104**. This provides a cooling fluid passing through the heat exchange array **2** that may be used to remove excess heat whilst in this bypass condition (ie with substantially all hot gas passing through the bypass). The flow of this fluid can be seen in FIGS. **12** and **13** which provide a model of the air flow and it can be seen that operating in this manner a flow of between 6 m/s and 11.5 m/s is induced within the heat exchange duct **59**. Within the intakes **1104** a flow rate of up to 56 m/s is induced.

Such a bypass condition may exist when for example there is a problem with the cooling fluid passing through the heat exchange array. As such, the heat exchange condition may exist as an emergency condition (for example cooling pumps circulating cooling fluid through the heat exchange array may fail whilst the supply of hot gas **1** is maintained—eg turbine still operates). It is conceivable that in such a condition, heat can build up in the heat exchange unit that is roughly in the range 1% to 4% of the heat in the exhaust heat. Such a heat build up may lead to boiling of the fluid within the heat exchange unit which the skilled person will appreciate should be avoided. Thus, air drawn through the intakes **1104** may provide a means to cool the heat exchange array **2** whilst it is being bypassed by the hot gas.

There are other ways of arranging the internals of the heat exchanger apart from those shown in FIGS. **1** to **13** above which could be developed within the scope of this invention.

The casing **1**, heat exchanger duct and annular fluid passage **58** are generally cylindrical, however, shapes having a non-circular cross section are also functional.

The heat exchanger may also be configured to operate with the exhaust gas flowing in the opposite direction to that shown in the figures with only relatively minor modifications to the internals.

The heat exchanger is most suited to operation in a vertical arrangement as shown in all figures, however, it may also be

16

operated in any other position, including horizontal and upside down, again with relatively minor modifications to the internals.

The damper may be actuated and guided by alternative means to those described above and as shown in the Figures, again within the scope of this invention.

The damper may form a frusto-conical shape in its open position rather than a cylindrical shape.

The damper may be alternatively designed to that described above, whereby the damper is made up of a plurality of segments, instead of one corrugated piece. For example three segments could be used beneficial, however any number may be used, with each being attached to an actuator, with the damper operating in a similar way to a clam shell. In this design the segments may require a seal on their long edges, which may be achieved using tubes between the baffle and the heat exchange casing for sealing on bypass, and tubes between the heat exchange casing and the outer casing for sealing when the damper is open to the heat exchange array. The tubes with holes along the length of the sealing face may be used to provide 100% seal using pressurised air in the tubes.

The induction system described in relation to FIGS. **11** to **13** may be used in association with any of the embodiments shown in FIGS. **1** to **10**. Likewise, any of the damper and damper control mechanisms described in relation to FIGS. **1** to **10** may be used in relation to FIGS. **11** to **13**.

The invention claimed is:

1. A heat exchange unit for hot gas recovery comprising, an inlet duct to which a heat exchange duct and a bypass duct are connected, one being surrounded by the other, a heat exchange array situated within the heat exchange duct, a central core around which the inner of the bypass and heat exchange ducts is provided, and a damper arranged to direct the flow of gas through the unit, wherein the damper comprises a plurality of sheet members, with a first subset of sheet members extending across at least one of the bypass duct and the heat exchange duct and a second subset of sheet members extending across the other of the bypass duct and the heat exchange duct, such that the damper is situated within the inlet duct and can be rotated, such that in a first position the first subset of sheet members of the damper provides a first continuous surface and substantially seals one of the heat exchange and bypass ducts from the inlet duct and in a second position the second subset of sheet members of the damper provides a second continuous surface and substantially seals the other of the ducts from the inlet duct, wherein the damper comprises a plurality of shafts, each shaft supporting at least one sheet member, wherein each shaft supports at least one sheet member in the heat exchanger duct and at least one sheet member in the bypass duct.

2. A unit according to claim **1** in which the damper comprises a damper surface.

3. A unit according to claim **2** in which the damper surface is provided by the sheet members.

4. A unit according to claim **3** in which some or all sheet members are corrugated or have one or more ledges at edge regions thereof.

5. A unit according to claim **4** in which each corrugation or ledge is radiused.

6. A unit according to claim **1** in which the central core is arranged to provide a valve seat against which the damper seals when in the first position.

7. A unit according to claim **1** in which an outer casing of the unit provides a valve seat against which the damper seals when in the second position.

17

8. A unit according to claim 7 in which the outer casing comprises a step which provides the valve seat.

9. A unit according to claim 1 in which the inner of the ducts provides the heat exchange duct and the outer of the ducts provides the bypass duct.

10. A unit according to any of claim 1 in which the inner of the ducts provides the bypass duct and the outer of the ducts provides the heat exchange duct.

11. A unit according to claim 1 in which at least one of the heat exchange and the bypass ducts is annular in shape.

12. A unit according to claim 1 in which the heat exchange duct and the bypass duct are selectively closable, and at least one of the ducts has one or more fluid intakes therein to each of which is arranged such that when one of the heat exchange duct or the bypass duct is substantially closed and fluid flows through the other of the ducts, fluid is drawn through the one or more intakes and into the substantially closed duct.

13. A unit according to claim 1 wherein the damper is arranged to provide a fluid impermeable barrier which moves from a continuous surface in one duct when in the first position to a continuous surface in the other duct when in the second position.

14. A unit according to claim 12 in which it is the heat exchange duct that has the or each intake positioned therein.

15. A unit according to claim 12 in which the or each intake is connected via a conduit to a supply of cooling fluid.

18

16. A unit according to claim 12 in which the or each intake is arranged such that fluid is drawn through them by a negative pressure created within the duct into which the or each intake is connected.

17. A unit according to claim 12 in which the heat exchange and bypass ducts are arranged such that fluid passing through one creates a negative pressure in the other.

18. A unit according to claim 1 wherein an end region of the central core provides a baffle upon which fluid, entering the unit, impinges.

19. A unit according to claim 1 wherein the shafts extend radially through the damper.

20. A unit according to claim 1 wherein at least one sheet member in the heat exchange duct is substantially perpendicular to at least one sheet member in the bypass duct.

21. A unit according to claim 1 wherein the sheet members are arranged in a louver.

22. A unit according to claim 1 in which the sheet members of the damper are oriented substantially parallel to the direction of fluid flow in the non-sealed duct when in the first or second position.

23. A unit according to claim 1 in which a sheet member of the first subset is paired with a sheet member of the second subset with one sheet member of each pair located in the heat exchange duct and the other sheet member of each pair located in the bypass duct.

* * * * *